DEMY (D&M) BEARINGS CO., LTD

DEMY MOTORCYCLE PARTS MANUFACTURING CO., LTD

Add：No.39,Lane158, Huancheng West Road,Ningbo,China

Tel：86-574-87103636 87103638 27879868 Fax：86-574-87103637 27879869

MOBILE：86-13905846672 P.C：315010

E-mail：sales@demy-bearing.com mbearing@mail.nbptt.zj.cn tmbearing@hotmail.com(msn)

http://www.demy-bearing.com //www.china-bmt.com

Design by yetian/13008934431

DEMY (D&M) BEARINGS CO., LTD

DEMY MOTORCYCLE PARTS MANUFACTURING CO., LTD

- Bearing
- Spark Plug
- Chain
- Sprockets
- Battery
- Tires
- Light
- Cable
- Belt
- Spare parts

Motorcycle Parts

http://www.demy-bearing.com
www.china-bmt.com

COMPANY INTRODUCTION

Demy (D&M) Bearings Co., Ltd. is a comprehensive manufacturer & exporter of Automobile- parts & Motorcycle-parts (Auto/motorcycle -bearing, Spark plug, Chain, Brake-shoe, Moto Battery, Sprockets and other machinery & transmission products) in China. We specialize in research and development of various kinds of high precision, non-noise, long-life bearings, high quality Auto parts & Moto-parts and other machinery & transmission products.

The company has 20 sets of production lines with the annual production capacity of 50 millions sets. Perfect measuring and testing measures & instruments have been adopted by company to ensure excellent quality. The company has been assessed & registered ISO 9001:2000 quality certificate. It is developing toward series of products with high quality and advanced technologies to create a global OEM and after-sale service system.

The company has strong stable relations with many worldwide users. The products have been found a steady market in North & South America, South-east Asia, Europe, Middle-east & some other countries & districts.

DEMY(D&M) BEARING CO., LTD will adhere to a long-term principle: "Quality first, Credit first & Service first" to welcome customers from home and abroad.

Brake shoe

Vehicle Brake
CD185、CD195、VT250
Specification：140x30



Vehicle Brake
XF125、MD90、45120-365-671
Specification：110x25 304



Vehicle Brake
CG125、C70、CD70、45120-365-671
Specification：110x25 303



Vehicle Brake
YB100、V50、296-25331-100
Specification：110x25 504

Vehicle Brake
A100、Ax100、K90、54410-01005
Specification：110x30 603

Vehicle Brake
QM50
Specification：75x25

Vehicle Brake
106
Specification：120x18

Vehicle Brake
208 JS\50\60
Specification：95x20



Vehicle Brake
518 CY80、V100
Specification：110x25

Vehicle Brake
105
Specification：95x18

Vehicle Brake
CD185、CD195、VT250
Specification：140x30



Vehicle Brake
GS125、B120、54410-07003
Specification：130x28

Vehicle Brake
302 CH100
Specification：95x20

Vehicle Brake
K125、B120 54410-08000
Specification：150x30

Vehicle Brake
104
Specification：90x18

Vehicle Brake
406 405
Specification：90x18 Specification：95x20



Vehicle Brake
BS125
Specification：150x30

Vehicle Brake
Yamaha 50 502
Specification：95x20

Vehicle Brake
CD175
Specification：140x25

Vehicle Brake
CB125T、CD125、TMX、43120-362-000
Specification：130x30 301

Vehicle Brake
TH90
Specification：120x25

Sprockets

428-40T

428-38T

428-36T

428-54T

428-36T

428-36T

428-43T

Setion in southeast Asia										
Models	L2G	KAZE	RXK	GI100	SUPRA	A100	Rc100	CRYPTON	V80	GL MAX
Chain	420	428	428	428	428	428	428	428	420	428
Tooth Few	37T-14T	44T-14T	37T-14T	38T-14T	40T-15T	36T-14T	35T-14T	37T-/14	37T-14T	40T-15T
Setion in southeast Asia										
Models	TORNADO	GRAND	C800	GN 5	CG 125	YL2GF	XRM	WIN	WAVE125	Rc80
Chain	420	428	420	428	428	428	428	428	420	428
Tooth Few	40T-14T	36T-14T	36T-14T	36T-14T	38T-15T	37T-14T	34T-14T	41T-14T	35T-14T	35T-14T
Setion in southeast Asia										
Models	CS 90	NOVA-S	VOVA-S							
Chain	428	428	428							
Tooth Few	38T-14T	36T-14T	35T-14T							

Setion in south America									
Models	TITAN99	TITAN2000	C100-BIZ	YBR125	XLR125	CBX200	AX 100	TS 125	V50	CG 125
Chain	428	428	428	428	428	520	428	428	420	428
Tooth Few	43T-14T	44T-14T	35T-14T	43T-14T	50T-14T	41T-14T	42T-14T	45T-14T	36T-14T	38-15T

Setion in Africa							
Models	RX 100	FR 80	XB 100	B120	A100	CG 125	K125
Chain		428	420	428	428	428	428
Tooth Few	37T-14T	33T-14T	37T-14T	32T-14T	36T-14T	38T-15T	38T-15T

Spark Plug

CHAMPION TO BMT

CHAMPION	BMT	CHAMPION	BMT	CHAMPION	BMT
Z10	A7T	N14YC	F5TC	C9BYC	K7TJC
Z10YC	A7TC	N11YC	F6TC	CJB	L6
RZ10YC	A7RTC	RN11YC	F6RTC	CJBY	L6T
A8	D7	N9BYC	F6TJC	CJ6	L7
A8Y	D8T	N9YC	F7TC	CJ7Y	L7T
A8YC	D8TC	RN9YC	F7RTC	J19LM	G3F
RA8YC	D8RTC	N7BYC	F7TJC	J12YC	G3TC
L86C	E6C	N7A	F8C	RJ11C	G5RC
L92Y	E6T	N7YC	F8TC	J17LM	G5F
L92YC	E6TC	C10YC	K6TC	JBC	G6
L87YC	E7TC	C10BYC	K6TJC	S9YC	Q7TC
RL87YC	E7RTC	RC10YC	K6RTC	DJ8J	N6
L82YC	E8TC	C9YC	K7TC	DJ6J	N9
N14Y	F5T	RC9YC	K7RTC	RF9YC	T5RTC

DENSO TO BMT

DENSO	BMT	DENSO	BMT	DENSO	BMT
U20FS	A7T	W16FR	E7TC	W20EX	F8TC
U20FP	A7TC	W16FPR	E7RTC	W20S	F8C
U20FPR	A7RTC	W14ER	F5T	Q16	K6TC
X16ES	D7	W14ER	F5TC	Q16R	K6RTC
X16EP	D8T	W16EP	F6TC	Q20P	K7TC
X16EP	D8TC	W16EXP	F6RTC	Q20PR	F7RTC
X16EPR	D8RTC	W20FR	F7TC	Q16PB	F6TJC
W14S	E6C	W20EPR	F7RTC	Q20PB	F7TJC
W14FP	E6TC	W20EB	F7TJC	MA20PR	T5RTC

NGK TO BMT

NGK	BMT	NGK	BMT	NGK	BMT
C7HSA	A7T	BPR6HS	E7RTC	BCPR5ES	K6RTC
C7HSA	A7TC	B7HS	E8C	BCP6ES	K7TC
CR7HS	A7RT C	BP7HS	E8TC	BCPR6ES	K7RTC
D7EA	D7	BP4E	F5T	BCP6EST	K6TJC
D8EA	D8T	BP4ES	F5TC	BCP6EST	K7TJC
D8EA	D8TC	BP5ES	F6TC	BM6A	L6
DR8EA	D8RTC	BPR5ES	F6RTC	BM7A	L7
BP4H	E5T	BP6ES	F7TC	BM7A	L7T
B4HS	E6C	BPR6ES	F7RTC	BM4A	L9T
BP4H	E6T	BP5ET	F7TJC	B6S	G6
BP4HS	E6TC	BP7ES	F8TC	APR6FS	T5RTC
B6HS	E7C	BP7E	F8C		
BP6HS	E7TC	BCP5ES	K6TC		

BOSCH TO BMT

BOSCH	BMT	BOSCH	BMT	BOSCH	BMT
DR8BC	T5RTC	W5DC	F8TC	WSR6F	L8RT
F6DC	K7TC	W6BC	E7TC	WR7BC	E7RTC
F6DTC	K6TJC	W6DC	F7DC	WR7DC	FR7TC
F7DC	F7TC	W7BC	E6TC	WR9EC	G5RC
F8TC	F6TC	W7DC	F7TC	WR9DC	F5RTC
FR6DC	F7RTC	W7DCR	F7RTC	WS5E	L9
FR6DTC	K6RTJC	W7DTC	F7TJC	WS5F	L9T
FR7DC	K7RTC	W8BC	E5TC	WS7E	L7
FR8DC	K6RTC	W8DC	F6TC	WS7F	L7T
H7DC	Q7TC	W8DTC	F6TJC	WS8E	L6
W5BC	E8TC	W9DC	F5TC	WS8F	L6T

Series	Product type	Size	Reach	Hex	Gap (mm)	Standard	Projective	Resistor	Conical	Small Hex	Bantam	Multi Electrode
A	A7TC	M10x1	12.7	16	0.6		●					
	A7RTC	M10x1	12.7	16	0.6		●	●				
B	B8RTC	M10x1	19	16	0.6		●	●				
C	C6TC	M12x1.25	12.7	17.5	0.6		●					
D	D7	M12x1.25	19	17.5	0.6	●						
	D8TC	M12x1.25	19	17.5	0.6		●					
	D8RTC	M12x1.25	19	17.5	0.6		●	●				
	E5C	M14x1.25	12.7	20.8	0.6	●						
	E5T	M14x1.25	12.7	20.8	0.6		●					
	E6C	M14x1.25	12.7	20.8	0.6	●						
E	E6TC	M14x1.25	12.7	20.8	0.6		●					
	E7C	M14x1.25	12.7	20.8	0.6	●						
	E7TC	M14x1.25	12.7	20.8	0.6		●					
	E7RTC	M14x1.25	12.7	20.8	0.6		●	●				
	E7TJC	M14x1.25	12.7	20.8	0.6		●					●
	E8C	M14x1.25	12.7	20.8	0.6	●						
	E8TC	M14x1.25	12.7	20.8	0.6		●					
F	F5C	M14x1.25	19	20.8	0.8	●						
	F5TC	M14x1.25	19	20.8	0.8		●					
	F6TC	M14x1.25	19	20.8	0.8		●					
	F6RTC	M14x1.25	19	20.8	0.8		●	●				
	F7TC	M14x1.25	19	20.8	0.8		●					
	F7RTC	M14x1.25	19	20.8	0.8		●					
	F7TJC	M14x1.25	19	20.8	0.8		●					●
	F8C	M14x1.25	19	20.8	0.8	●						
G	G3F	M14x1.25	9.5	20.8	0.6	●						
	G3TC	M14x1.25	9.5	20.8	0.6		●					
	G5RC	M14x1.25	9.5	20.8	0.6	●						
	G6	M14x1.25	9.5	20.8	0.6	●		●				
H	H5	M14x1.25	11	20.8	0.75	●						
K	K5RTCF	M14x1.25	19	16	0.8		●	●		●		
	K6TC	M14x1.25	19	16	0.8		●			●		
	K6TJC	M14x1.25	19	16	0.8		●			●		
	K6RTC	M14x1.25	19	16	0.8		●	●		●		
	K6RTJF	M14x1.25	19	16	0.8		●	●		●		
	K6RTJC	M14x1.25	19	16	0.8		●	●		●		●
	K7TC	M14x1.25	19	16	0.8		●			●		
	K7RTC	M14x1.25	19	16	0.8		●	●		●		
L	L5C	M14x1.25	9.5	19	0.6	●					●	
	L5T	M14x1.25	9.5	19	0.6		●				●	
	L6	M14x1.25	9.5	19	0.6	●					●	
	L6T	M14x1.25	9.5	19	0.6		●				●	
	L7	M14x1.25	9.5	19	0.6	●					●	
	L7T	M14x1.25	9.5	19	0.6		●				●	
	L8RT	M14x1.25	9.5	19	0.6		●	●			●	
	L9	M14x1.25	9.5	19	0.6	●					●	
	L9T	M14x1.25	9.5	19	0.6		●				●	
M	M5	M14x1.25	11	19	0.75	●					●	
	M7	M14x1.25	11	19	0.75	●					●	
N	N6	M14x1.25	7.8	19	0.6	●			●		●	
	N9	M14x1.25	7.8	19	0.6	●			●		●	
Q	Q7TC	M14x1.25	17.5	16	0.7		●		●		●	
R	R4C	M14x1.5	12	22	0.7	●						
T	T5RTC	M14x1.5	10.9	20.8	0.7		●	●	●			
Z	Z4C	M14x1.25	11	19	0.6	●						
	Z8C	M14x1.25	11	19	0.6	●						

Chains

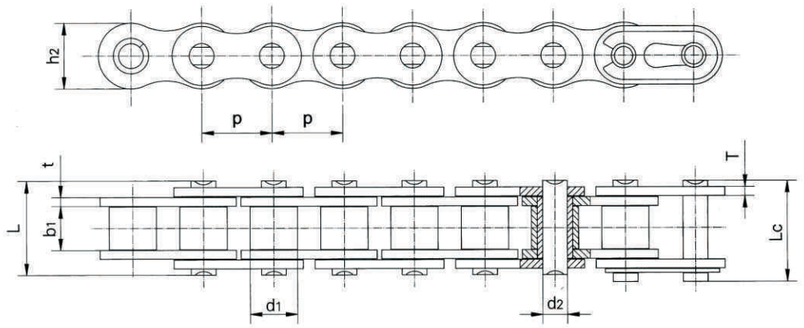

Chain N0.		Pitch	Roller diameter	Width between inner	Pin diameter	Inner plates depth	Width over bearing	Width over connecting	Plate thickness	Ultimate tensile strength	Dynamic strength	Mass per meter
ISO JCAS	MBT	p mm	d1 max mm	Plates b1 min mm	d2 max mm	h2 max mm	Pins L max mm	Pins Lc max mm	t /T	Fu min kN	Fd min N	q ≈ kg/m
*25H	*25H	6.350	3.30	3.10	2.31	6.00	9.1	10.1	1.00	4.80	810	0.17
*219H	*219H	7.774	4.59	4.68	3.17	7.60	12.6	14.3	1.40	7.30	1260	0.28
420	420	12.70	7.77	6.25	3.99	12.00	14.9	16.4	1.50	15.60	2860	0.55
420H	420H	12.70	7.77	6.25	3.99	12.00	17.5	18.9	1.80	20.00	3420	0.76
428	428	12.70	8.51	7.85	4.51	12.00	16.9	18.8	1.50	15.70	2860	0.69
428H	428H	12.70	8.51	7.85	4.51	12.00	18.9	20.8	2.00	20.50	3420	0.79
520	520	15.875	10.16	6.25	5.09	15.30	17.5	19.7	2.00	26.40	4840	0.89
520H	520H	15.875	10.16	6.25	5.09	15.30	19.0	21.2	2.20	31.30	5170	1.10
530	530	15.875	10.16	9.40	5.09	15.30	20.8	22.9	2.00	26.40	4840	1.06
530SH	530SH	15.875	10.22	9.40	5.40	15.30	23.1	25.1	2.40	30.40	5490	1.24
630	630	19.05	11.90	9.40	5.96	18.60	24.0	26.2	2.40	35.30	7290	1.50
	520R	15.875	10.16	7.00	5.09	13.50	18.2	20.5	1.9/1.75	22.50	4240	0.78

* Bushing chain:d1 in the table indicates the external diameter of the bushing.

Motorcycle Battery

YB series storage batteries for motorcycles outline dimension and specifications

12 VOLT

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN) L	W	H	With liquid Weight Kg	Plus acid L	Normal charge current A
YB2.5L-C	2.5	3.15	2.76	4.13	1.2	0.25	0.25
YB2.5L-C-1	2.5	3.15	2.76	4.13	1.2	0.25	0.25
YB2.5L-C-2	2.5	3.15	2.76	4.13	1.2	0.25	0.25
YB2.5LA	2.5	3.15	2.99	4.13	1.2	0.25	0.25
YB3L-A	3	3.86	2.20	4.33	1.5	0.4	0.3
YB3L-B	3	3.86	2.20	4.33	1.5	0.4	0.3
YB4L-A(2)	4	4.72	2.76	3.62	1.9	0.4	0.4
YB4L-B(2)	4	4.72	2.76	3.62	1.9	0.4	0.4
YB5L-B	5	4.72	2.36	5.12	2.1	0.45	0.55
YB5L-B2	5	4.72	2.36	5.12	2.1	0.45	0.55
YB5AL-B2	5	4.45	2.76	4.13	2.1	0.45	0.55
YB6L-A	6	5.43	2.91	3.94	2.3	0.45	0.55
YB6L-B	6	5.43	2.91	3.94	2.3	0.45	0.55
YB6AL-A	6	5.43	2.91	3.74	2.3	0.45	0.6
YB6AL-B	6	5.43	2.91	3.74	2.3	0.45	0.6
YB6.5L-A	6	5.43	2.56	3.94	2.3	0.45	0.6
YB6.5L-B	6	5.43	2.56	3.94	2.3	0.45	0.6
YB6.5AL-A	6.5	5.43	2.91	4.43	2.5	0.5	0.65
YB6.5AL-B	6.5	5.43	2.91	4.43	2.5	0.5	0.65
YB7L-A	8	5.31	2.95	5.24	2.8	0.55	0.8
YB7-A	8	5.31	2.95	5.24	2.8	0.55	0.8
YB7-A2	8	5.31	2.95	5.24	2.8	0.55	0.8
YB7L-B	8	5.31	2.95	5.24	2.8	0.55	0.8
SYB10L-A2	11	5.31	3.54	5.71	4.0	0.8	1.2
YB10L-B	11	5.31	3.54	5.71	4.0	0.8	1.2
YB10L-B2	11	5.31	3.54	5.71	4.0	0.8	1.2
YB10A-A2	11	5.31	3.54	6.10	4.0	0.8	1.2
YB10A-B	11	5.31	3.54	6.10	4.0	0.8	1.2
YB12AL-A	12	5.28	3.15	6.3	4.1	0.8	1.2
YB12AL-A2	12	5.28	3.15	6.3	4.1	0.8	1.2
YB12A-A	12	5.28	3.15	6.3	4.1	0.8	1.2
YB12A-AK	12	5.28	3.15	6.3	4.1	0.8	1.2
YB12A-B	12	5.28	3.15	6.3	4.1	0.8	1.2

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN) L	W	H	With liquid Weight Kg	Plus acid L	Normal charge current A
YB12B-B2	12	6.30	3.54	5.12	4.1	0.8	1.2
YB12C-A	12	5.28	3.15	6.89	4.1	0.8	1.2
YB12D-B2	12	5.83	3.46	5.11	4.3	0.9	1.4
YB14L-A	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14L-A1	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14L-A2	14	5.28	3.50	6.54	4.6	0.8	1.4
SYB14L-A2	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14-A2	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14L-B2	14	5.28	3.50	6.54	4.6	0.8	1.4
SYB14L-B2	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14-B2	14	5.28	3.50	6.54	4.6	0.8	1.4
YB14A-A1	14	5.28	3.50	6.93	4.6	0.9	1.4
YB14A-A2	14	5.28	3.50	6.93	4.6	0.9	1.4
YB16AL-A2	16	8.07	2.76	6.38	5.3	1.2	1.6
YB16L-B	19	6.89	3.94	6.10	5.9	1.3	1.9
SYB16L-B	19	6.89	3.94	6.10	5.9	1.3	1.9
YB16L-B2	19	6.89	3.94	6.10	5.9	1.3	1.9
YB16-B	19	6.89	3.94	6.10	5.9	1.3	1.9
YB16CL-B2	19	6.89	3.94	6.89	5.9	1.3	1.9
YB16B-A(2)	16	6.30	3.54	6.34	5.3	1.1	1.6
YB18L-A(2)	18	7.09	3.54	6.38	5.8	1.3	1.8
YB18-A(2)	18	7.09	3.54	6.38	5.8	1.3	1.8
Y50-N18L-A	20	8.07	3.54	6.93	6.5	1.4	2.0
SY50-N18L-A	20	8.07	3.54	6.93	6.5	1.4	2.0
Y50-N18L-A3	20	8.07	3.54	6.93	6.5	1.4	2.0
Y50-N18-A	20	8.07	3.54	6.93	6.5	1.4	2.0
Y60-N24L-A	28	7.24	4.88	6.69	8.4	1.8	2.8
Y60-N24-A	28	7.24	4.88	6.69	8.4	1.8	2.8
Y60-N24L-B	28	7.24	4.88	6.69	8.4	1.8	2.8
Y60-N24-B	28	7.24	4.88	6.69	8.4	1.8	2.8
Y60-N24L	28	7.24	4.88	6.69	8.4	1.8	2.8
Y60-N24	28	7.24	4.88	6.69	8.4	1.8	2.8

Motorcycle Battery

YT series maintenance-free storage batteries for motorcycles outline dimension and specifications

12 VOLT

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN)			With liquid Weight	Plus acid	Normal charge current	CCA
		L	W	H	Kg	L	A	A
YT4L-BS	3		2.76	3.35	1.5	0.18	0.4	35
YTX4L-BS	3	4.45	2.76	3.35	1.6	0.18	0.4	50
YTR4A-BS	2.3	4.45	1.89	3.35	1.1	0.12	0.3	45
YT4B-BS	2.3	4.45	1.5	3.35	1.0	0.10	0.3	40
YTZ5S-BS	3.5	4.45	2.76	3.35	1.6	0.21	0.4	65
YT5L-BS	4	4.45	2.76	4.13	1.9	0.24	0.5	45
YTX5L-BS	4	4.45	2.76	4.13	2.0	0.24	0.5	70
YTZ5-BS	4.5	4.45	2.76	4.13	1.8	0.27	0.5	85
YT6B-BS	6	4.45	2.76	4.13	2.4	0.31	0.6	90
YTX7L-BS	6	4.45	2.76	5.12	2.6	0.33	0.6	85
YTX7A-BS	6	4.45	3.43	3.66	2.7	0.33	0.7	90
YT7B-BS	6.5	5.9	2.56	3.66	2.9	0.31	0.7	85
YTZ7S-BS	6	5.9	2.76	4.13	2.2	0.31	0.6	130
YTX9-BS	8	4.45	3.43	4.13	3.1	0.40	0.9	120
YT9B-BS	8	5.9	2.72	4.13	3.5	0.40	0.9	120
YTZ10S-BS	8.6	5.9	3.43	3.66	3.0	0.40	0.9	190
YT12B-BS	10	5.9	2.72	5.12	4.1	0.5	1.0	180
YT12A-BS	10	5.9	3.43	4.13	3.5	0.5	1.0	175
YTX12-BS	10	5.9	3.43	5.12	4.2	0.6	1.2	180
YTZ12S-BS	11	5.9	3.43	4.33	3.7	0.5	1.1	210
YTX14-BS	12	5.9	3.43	5.7	4.6	0.7	1.4	200
YT14B-BS	12	5.9	2.72	5.7	4.6	0.6	1.4	135
YTZ14-BS	14	5.9	3.43	5.7	5.0	0.7	1.4	230
YTZ14S-BS	11.2	5.9	3.43	4.33	3.9	0.76	1.1	230
YTX16-BS	14	5.9	3.43	6.34	5.2	0.76	1.4	230
YTX16-BS-1	14	5.9	3.43	6.34	5.2	0.82	1.4	230
YTZ16-BS	18	5.9	3.43	6.34	6.1	0.82	1.8	250
YTX20-BS	18	5.9	3.43	6.1	6.1	0.93	1.8	270
YTX20L-BS	18	6.9	3.43	6.1	6.1	0.93	1.8	270
YTX20A-BS	17	6.9	3.43	6.34	5.8	0.82	1.8	270

6MF series maintenance-free storage batteries for motorcycles outline dimension and specifications

12 VOLT

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN)			With liquid Weight	Plus acid	Normal charge current	CCA A -10℃
		L	W	H	Kg	L	A	
6MF2.5-BS	2	3.15	2.76	4.1	1.1	0.18	0.25	15
6MF2.5L-BS	2	3.15	2.76	4.1	1.1	0.18	0.25	15
6MF3-BS	2.5	3.86	2.2	4.33	1.3	0.20	0.3	20
6MF3L-BS	2.5	3.86	2.2	4.33	1.3	0.20	0.3	20
6MF4-BS	3	4.72	2.76	3.62	1.7	0.24	0.4	25
6BF4L-BS	3	4.72	2.76	3.62	1.7	0.21	0.4	25
6MF5-BS	4	4.72	2.36	5.12	2.1	0.31	0.5	30
6MF5L-BS	4	4.72	2.36	5.12	2.1	0.31	0.5	30
6MF6-BS	5	5.31	2.36	4.13	2.3	0.31	0.6	40
6MF6L-BS-	5	5.31	2.76	4.13	2.3	0.31	0.6	40
6MF7B-BS	6	5.9	2.76	51.2	2.7	0.46	0.7	50
6MF7BL-BS	6	5.9	2.36	5.12	2.7	0.46	0.7	50
6MF7-BS	6	5.31	2.36	5.24	3.0	0.46	0.7	50
6MF7L-BS	6	5.31	2.95	5.24	3.0	0.46	0.7	50
6MF9-BS	8	5.31	2.95	5.47	3.2	0.50	0.9	60
6MF9L-BS	8	5.31	2.95	5.47	3.2	0.50	0.9	60

Belt

Motorcycle Battery

N series storage batteries for motorcycles outline dimension and specifications

12 VOLT

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN)			With liquid Weight	Plus acid	Normal charge current
		L	W	H	Kg	L	A
12N4-3A	4	4.72	2.76	3.62	1.6	0.3	0.4
12N4-3B	4	4.72	2.76	3.62	1.6	0.3	0.4
12N5-3A	5	4.72	2.36	5.12	1.9	0.4	0.5
12N5-4A	5	4.72	2.36	5.12	1.9	0.4	0.5
12N5-3B	5	4.72	2.36	5.12	1.9	0.4	0.5
12N5-4B	5	4.72	2.36	5.12	1.9	0.4	0.5
12N5A-3A	5	5.43	2.91	3.74	2.1	0.45	0.5
12N5A-4A	5	5.43	2.91	3.74	2.1	0.45	0.5
12N5.5-3A	5.5	5.31	2.36	5.12	2.2	0.45	0.55
12N5.5-4A	5.5	5.31	2.36	5.12	2.2	0.45	0.55
12N5.5-3B	5.5	5.31	2.36	5.12	2.2	0.45	0.55
12N5.5-4B	5.5	5.31	2.36	5.12	2.2	0.45	0.55
12N5.5A-3B	5.5	4.06	3.54	4.49	2.2	0.45	0.55
12N6-3A	6	5.43	2.91	3.94	2.2	0.45	0.6
12N6-4A	6	5.43	2.91	3.94	2.2	0.45	0.6
12N6-3B	6	5.43	2.91	3.94	2.2	0.45	0.6
12N6-4B	6	5.43	2.91	3.94	2.2	0.45	0.6
12N6A-3A	6	5.43	2.56	3.94	2.2	0.45	0.6
12N6A-3B	6	5.43	2.56	3.94	2.2	0.45	0.6
12N7-3A	7	5.31	2.95	5.24	2.8	0.55	0.7
12N7-4A	7	5.31	2.95	5.24	2.8	0.55	0.7
12N7-3B	7	5.31	2.95	5.24	2.8	0.55	0.7
12N7-4B	7	5.31	2.95	5.24	2.8	0.55	0.7

N series storage batteries for motorcycles outline dimension and specifications

6 VOLT

Battery type	Capacity Ah	Dimensions Inch (±0.08 IN)			With liquid Weight	Plus acid	Normal charge current
		L	W	H	Kg	L	A
6N2-2A	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2-2A-1	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2-2A-3	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2-2A-4	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2-2A-8	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2-2D	2	2.76	1.81	3.74	0.7	0.14	0.2
6N2A-2C	2	2.76	1.81	4.13	0.7	0.14	0.2
6N2A-2C-1	2	2.76	1.81	4.13	0.7	0.14	0.2
6N2A-2C-2	2	2.76	1.81	4.13	0.7	0.14	0.2
6N4-2A	4	2.76	2.76	3.74	1.0	0.2	0.4
6N4-2A-3	4	2.76	2.76	3.74	1.0	0.2	0.4
6N4-2A-4	4	2.76	2.76	3.35	1.0	0.2	0.4
6N4-2A-5	4	2.76	2.76	3.35	1.0	0.2	0.4
6N4-2A-6.8	4	2.76	2.76	3.35	1.0	0.2	0.4
6N4A-4D	4	2.36	2.20	5.12	1.1	0.2	0.4
6N4B-2A	4	3.86	1.81	3.70	1.1	0.2	0.4
6N4B-2A-1	4	3.86	1.81	3.70	1.1	0.2	0.4
6N4B-2A-3	4	3.86	1.81	3.70	1.1	0.2	0.4
6N5.5-1D	5.5	3.54	2.76	3.90	1.2	0.3	0.55
6N5.5-1D-1	5.5	3.54	2.76	3.90	1.2	0.3	0.55

Cable

Clutch Cable • Choke Cable • Throttle Cable
Speedometer Cable • Brake Cable

BMT001

2.25-17 4PR/6PR
2.50-17 4PR/6PR
2.75-18 4PR/6PR
3.00-18 4PR/6PR
3.25-18 4PR/6PR
3.50-18 4PR/6PR
2.50-16 4PR/6PR
2.75-17 4PR/6PR
3.00-17 4PR/6PR
3.25-16 4PR/6PR
3.50-16 4PR/6PR

BMT002

2.50-17 4PR/6PR
2.75-17 4PR/6PR
2.75-21 4PR/6PR
4.10-18 4PR/6PR
2.50-18 4PR/6PR
2.75-18 4PR/6PR
3.00-18 4PR/6PR



BMT003

2.50-18 4PR/6PR
3.00-18 6PR
3.00-18 4PR

BMT004

3.00-8 4PR/6PR
2.75-14 4PR/6PR
3.00-17 4PR/6PR

BMT005

3.00-8 4PR/6PR
3.00-10 4PR/6PR

BMT006

3.00-10 4PR
3.00-10 6PR

BMT007

3.00-10 4PR
3.00-10 6PR

BMT008

2.50-17 4PR/6PR
2.50-18 4PR/6PR

BMT009

2.25-17 4PR/6PR
2.50-17 4PR/6PR
2.25-18 4PR/6PR
2.50-18 4PR/6PR

BMT010

3.25-16 4PR
3.25-16 6PR

BMT011

2.50-17 4PR/6PR
2.75-17 4PR/6PR
2.50-18 4PR/6PR
2.75-18 4PR/6PR

BMT012

2.25-17 4PR/6PR
2.75-17 4PR/6PR
2.50-17 4PR/6PR
80/90-17 4PR/6PR

BMT013

3.25-16 4PR
3.25-16 6PR

BMT014

3.75-19 4PR
3.75-19 6PR

BMT015

110/90-16 4PR
110/90-16 6PR

BMT016

4.00-12 4PR
4.00-12 6PR

BMT017

4.00-17 4PR/6PR

BMT018

2.75-18 4PR/6PR
3.00-18 4PR/6PR
110/90-16 4PR/6PR
2.75-21 4PR/6PR
4.10-18 4PR/6PR

BMT019

2.25-17 4PR/6PR
2.50-18 4PR/6PR
2.75-18 4PR/6PR
2.50-17 4PR/6PR
2.75-17 4PR/6PR
3.00-18 4PR/6PR

BMT020

2.50-17 4PR/6PR
3.00-18 4PR/6PR
2.75-18 4PR/6PR

BMT021

2.25-17 4PR/6PR
2.50-18 4PR/6PR
2.50-17 4PR/6PR

BMT022

2.25-17 4PR/6PR
2.50-18 4PR/6PR
2.50-17 4PR/6PR
2.75-17 4PR/6PR

BMT023

3.00-17 4PR/6PR
3.00-18 4PR/6PR

BMT024

3.00-17 4PR/6PR
3.00-18 4PR/6PR

BMT025

3.00-18 4PR
3.00-18 6PR

BMT026

2.50-17 4PR/6PR
2.75-21 4PR/6PR
3.00-18 4PR/6PR
2.50-18 4PR/6PR
3.00-17 4PR/6PR

BMT027

2.75-18 4PR
2.75-18 6PR

BMT028

2.75-17 4PR/6PR
2.75-18 4PR/6PR

BMT029

90/90-18 4PR
90/90-18 6PR

BMT030

3.00-18 4PR/6PR
3.25-18 4PR/6PR
3.50-18 4PR/6PR
3.25-16 4PR/6PR
3.50-16 4PR/6PR

BMT031

4.50-12 4PR
4.50-12 6PR

BMT032

4.00-12 4PR
4.00-12 6PR

BMT033

3.00-18 4PR
3.00-18 6PR

BMT034

3.50-10 4PR
3.50-10 6PR

BMT035

4.00-8 4PR
4.00-8 6PR

Tires

BMT036

3.50-10 4PR
3.50-10 6PR

BMT037

2.50-17 4PR/6PR
2.75-17 4PR/6PR
3.00-17 4PR/6PR
2.50-18 4PR/6PR
2.75-18 4PR/6PR

BMT038

2.75-14 4PR
2.75-14 6PR

BMT039

2.50-17 4PR
2.50-17 6PR

BMT040

2.75-18 4PR
2.75-18 6PR

BMT041

2.75-17 4PR/6PR

BMT042

2.75-17 4PR
2.75-17 6PR

BMT043

(TUBELESS)3.00-18 6PR/8PR
(TUBELESS)3.25-18 6PR/8PR

BMT044

3.00-16 4PR/6PR
3.00-18 4PR/6PR
3.00-17 4PR/6PR
3.25-16 4PR/6PR

BMT045

110/90-16 4PR/6PR
130/90-15 4PR/6PR
(TUBELESS)110/90-16 6PR/8PR

BMT046

(TUBELESS)3.50-10 6PR
(TUBELESS)3.50-10 8PR

BMT047

(TUBELESS)3.00-10 6PR
(TUBELESS)3.00-10 8PR

BMT048

(TUBELESS)3.50-10 6PR
(TUBELESS)3.50-10 8PR

BMT049

3.50-10 4PR
3.50-10 6PR

BMT050

3.00-12 4PR
3.00-12 6PR

BMT051

2.25-17 4PR/6PR
2.75-17 4PR/6PR
2.50-17 4PR/6PR

BMT052

2.25-17 4PR/6PR
2.70-17 4PR/6PR
2.50-17 4PR/6PR

BMT053

2.75-14 4PR/6PR

BMT054

2.25-17 4PR/6PR

BMT055

2.25-17 4PR/6PR
2.50-17 4PR/6PR

BMT056

3.50-10 4PR/6PR

BMT057

2.25-17 4PR/6PR
80/90-17 4PR/6PR
2.50-17 4PR/6PR

BMT058

2.25-17 4PR/6PR

BMT056

3.00-18 4PR/6PR

BMT060

2.25-17 4PR/6PR
2.50-18 4PR/6PR

BMT061

3.50-8 4PR/6PR

BMT062

3.50-8 4PR/6PR

BMT063

3.50-8 4PR/6PR

BMT064

2.50-17 4PR/6PR
2.75-17 4PR/6PR
3.00-18 4PR/6PR
3.00-18 4PR/6PR
2.75-14 4PR/6PR
2.75-18 4PR/6PR
3.00-16 4PR/6PR

BMT065

3.00-16 4PR/6PR

Inner Tube

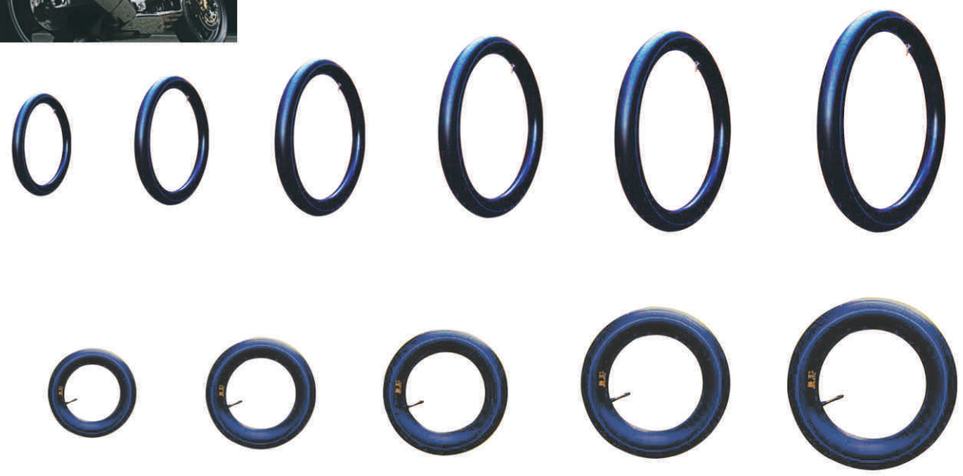

TR175A TZ1-45 JS-2(P29)

TR87 PVR79 TR26-30 T25-33 DIN7777

TR78A TR77A TR75A

TR1 TR4 TR6 TR13 TR15 TR150A TR412 TR413 TR414 TR418 TR425 TR412L

185-17	200-17	225-16	225-17	250-14	250-16	250-17	250-18	275-10	275-14	275-16	275-17	80/90-17	275-18	
275-21	300-8	300-10	300-12	300-14	300-16	300-17	300-18	300-19	325-10	325-16	325-18	350-7	350-8	
350-10	350-16	350-18	375-10	375-19	400-8	400-10	400-12	400-16	410-18	450-12	450-16	450-18	90/90-18	
110/90-16	130/90-15													

Spare parts

0004
TUERCA 17mm

0014
BULE 17mm

0005
TUERCA 19mm

0012
CONO DE VARILLA

0013
TUERCA DE VARILLA 6mm



0002
PERNOC/BULE 10mm

0011
TENSOR 6mm

0003
SEGURO

Bearings

60/22	608	6202
60/28	6000	6203
60/32	6001	6204
62/22	6002	6205
62/28	6003	6300
62/32	6004	6301
63/22	6005	6302
63/32	6006	6302QR
98205	6007	6303
98305	6200	6304
16002	6201	6305
16003	61805	68304